

VideoMic

Directional Video Condenser Microphone

RØDE
MICROPHONES

Features


- Studio recording quality
- Condenser microphone
- 9V battery powered
- Integrated Rycote® Lyre® shock mounting
- Two step High Pass Filter (Flat/80Hz)
- Three step PAD (0, =10, -20dB)
- Rugged reinforced ABS construction
- Windshield included
- 3.5mm mini-jack output
- Integrated cold-shoe mount, 1/4" and 3/8" thread
- Designed in Australia
- Full 10 year warranty*




Specifications

Acoustic Principle	Line Gradient	Directional Pattern	Super-Cardioid
Frequency Range	40Hz ~ 20,000Hz (selectable HPF@80Hz)	Sensitivity	-38dB ±2dB re 1V/Pa @ 1kHz
Nominal Impedance	200Ω - phantom power	Equivalent Noise	20dBA SPL (A - weighted per IEC651)
Maximum Output	+6.9dBu (@ 1% THD into 1kΩ)	Dynamic Range	114dB (per IEC651)
Maximum SPL	134dB (@ 1kHz, 1% THD into 1kΩ load)	Signal/Noise	74dB SPL (A - weighted per IEC651)
Power Req.	9V alkaline battery (Current 5mA)	Dimensions	255mmL x 90mmH x 100mmD
Output Connection	3.5mm mini-jack	Net Weight	171g

Frequency Response

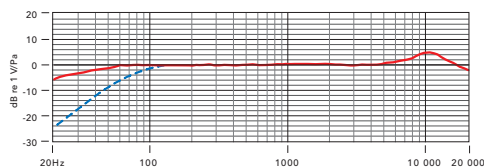

Polar Pattern



Included Accessories

- WSVM windshield



www.rodemic.com

*After online registration

Australia
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
6385 Rose Lane, Carpinteria CA 93013 USA
Ph: +1 805 566 7777 Fx: +1 805 566 0071