

# NTG4+

Directional Condenser Microphone with Inbuilt Battery


**AUSTRALIA**  
107 Carnarvon st, Silverwater NSW 2128 Australia  
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

**USA**  
PO Box 91028, Long Beach CA 90809-1028  
Ph: +1 562 364 7400 Fax: +1 888 412 4664




## Frequency response


FLAT

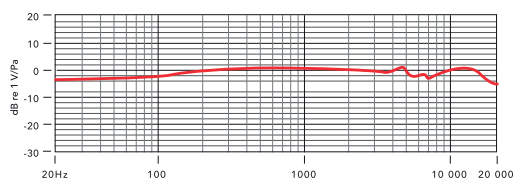

HIGH BOOST

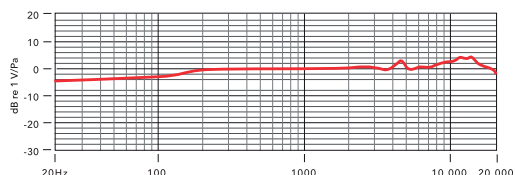

HIGH PASS

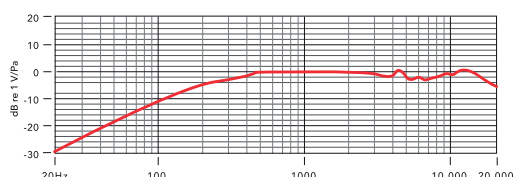

## Features

- Broadcast sound quality
- Low noise circuitry
- Condenser transducer
- Rugged metal construction
- Internal rechargeable battery with 150 hours operation
- High Frequency Boost
- High Pass Filter (0Hz/75Hz)
- PAD (-10db)
- Designed and manufactured in Australia
- Full 10 year warranty (with online registration)

## Incl. accessories

- RM5 Mic Clip
- Foam Windshield
- ZP1 Pouch
- Micro USB

## Specifications

Acoustic Principle	Line Gradient
Directional Pattern	Super-Cardioid
Frequency Range	20Hz ~ 20,000Hz (selectable HPF @ 75Hz)
Sensitivity	-32dB re 1V/Pa (25mV @ 94db SPL) ±2dB @ 1kHz.
Output Impedance	200Ω
Equivalent Noise	16dBA SPL (per IEC651)
Maximum Output	7dBu (@ 1kHz, 1% THD into 1kΩ)
Dynamic Range	119dB (per IEC651)
Maximum SPL	135dB
Signal to Noise Ratio	78dB SPL (per IEC651)
Power Req.	48V Phantom Power (4.8mA current draw) or internal rechargeable lithium battery.
Battery Charger	MicroUSB cable (supplied)
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Dimensions	22 x 278mm
Net Weight	176g

## Polar pattern

